


NEW



125 A

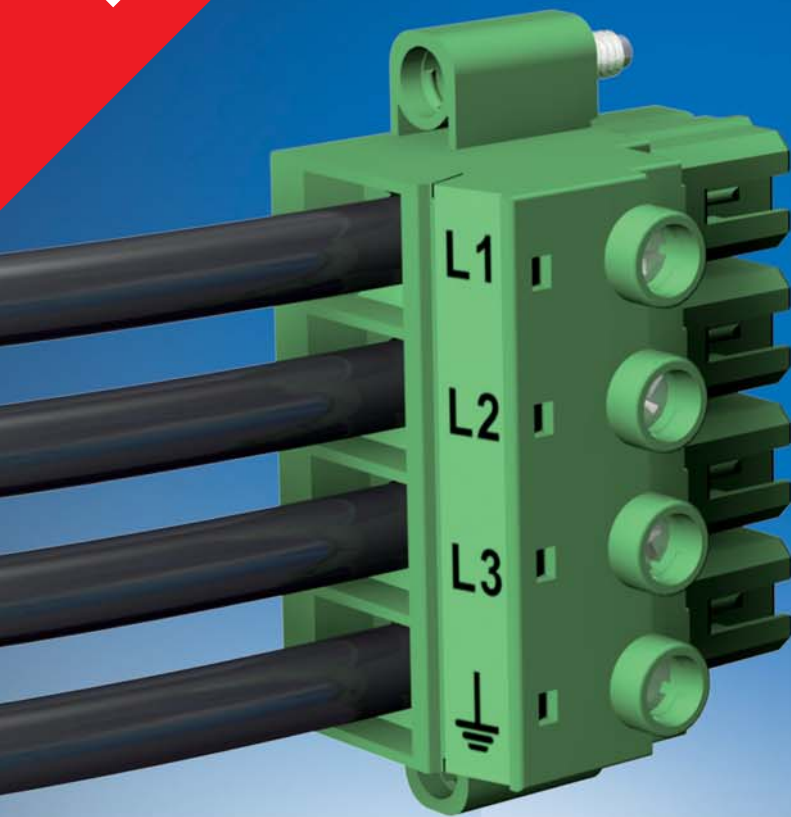


**A new record –
125 A plugged
onto the PCB!**

A new record – 125 A plugged onto the PCB!

PC 35 – That is the new PCB connector from Phoenix Contact with a current carrying capacity of up to 125 A.

Thanks to the low insertion and withdrawal forces, device connections can be easily established even in the high performance class. The screw flange can also be used simultaneously as a panel feed-through on the PCB side, thus providing additional support in the device.

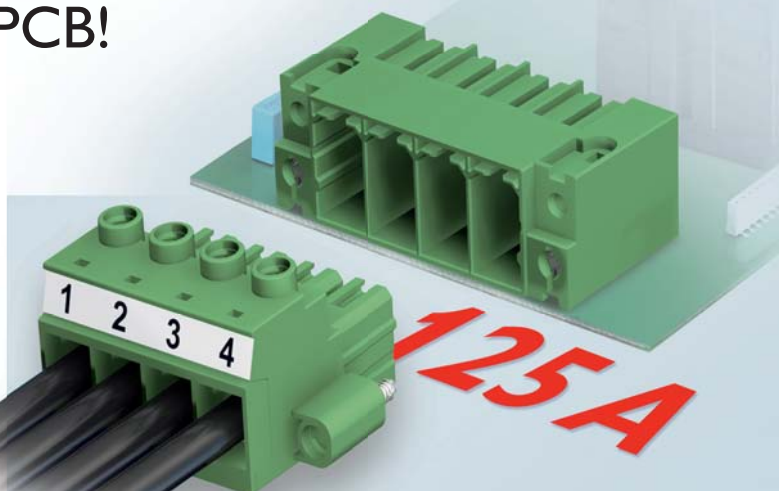

Technical data

IEC: 1000 V / 125 A

UL: 600 V / 115 A

Raster 15 mm

0,5 – 35 mm²


20 – 2 AWG



Ordering data: PC 35 with mounting flange

No. of pos.	Plug		Horizontal base strip		Vertical base strip	
	Order No.	Designation	Order No.	Designation	Order No.	Designation
2-pos.	1762592	PC 35 HC/ 2-STF-15,00	1762741	PC 35 HC / 2-GF-15,00	1762796	PCV 35 HC / 2-GF-15,00
3-pos.	1762602	PC 35 HC/ 3-STF-15,00	1762754	PC 35 HC / 3-GF-15,00	1762806	PCV 35 HC / 3-GF-15,00
4-pos.	1762615	PC 35 HC/ 4-STF-15,00	1762767	PC 35 HC / 4-GF-15,00	1762819	PCV 35 HC / 4-GF-15,00
5-pos.	1762628	PC 35 HC/ 5-STF-15,00	1762770	PC 35 HC / 5-GF-15,00	1762822	PCV 35 HC / 5-GF-15,00
6-pos.	1762631	PC 35 HC/ 6-STF-15,00	1762783	PC 35 HC / 6-GF-15,00	1762835	PCV 35 HC / 6-GF-15,00

Ordering data: PC 35 with mounting flange and shield

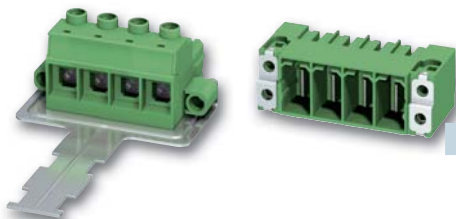

No. of pos.	Plug		Horizontal base strip	
	Order No.	Designation	Order No.	Designation
4-pos.	1762848	PC 35 HC / 4-ST F-SH-15,00	1762851	PC 35 HC/ 4-GF-SH-15,00

PHOENIX CONTACT GmbH & Co. KG
D-32823 Blomberg
Tel.: +49 (0) 52 35 3-00
Fax: +49 (0) 52 35 3-1 07 99
E-Mail: info@phoenixcontact.com
www.phoenixcontact.de
www.phoenixcontact.de/eshop